


- PUBLIC PARKS
- CALMED TRAFFIC ZONES
- COURTS D'HONNEUR
- ACCESS AND MINOR ROADS
- PEDESTRIAN PRECINCTS

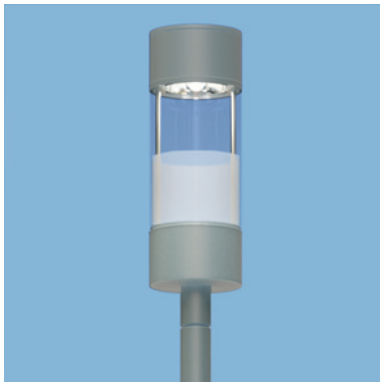


LANOVA Post top Lightstack
with system pole.

Housing made of die-cast aluminium, aluminium, stainless steel, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, partially satin finish PMMA diffuser - choice of symmetric or asymmetric high performance mini-road reflector optics, features fast relamping by easily removable E-Block with optics integrated in the top, Ø: 230mm, H: 720mm, protection category IP65, protection class I with option class II, cylindrical galvanised steel pole with stepped top Ø: 76/90mm,

painted, with extended buried base and anti-sink plate set, CE-approval according to EU construction-product regulations, supplied with IP54 fuse box 2x5x16mm² for loop in-and-out, pole height H: 4100/800mm, LPH: 4640mm, standard colour: graphite-mica finish

Aw: 0,175 m², weight: 11 kg
Lightstack SX 280 ■ ■ - ■

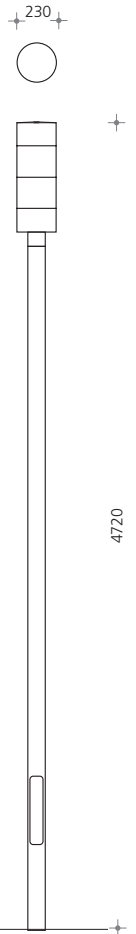


mini-road
asymmetric




mini-road
symmetric

HIT-CE


20W** → 3 0		
LVK → 7625		
35W* → 3 1		
LVK → 7625		
70W* → 3 2		
LVK → 7625		
20W** → 6 0		
LVK → 7624		
35W* → 6 1		
LVK → 7624		
70W* → 6 2		
LVK → 7624		



LANOVA Catenary suspended

luminaire with 2-way suspension. Housing made of die-cast aluminium, aluminium, stainless steel, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, partially satin finish PMMA diffuser- symmetric high performance mini-road reflector optics, features fast relamping by easily removable E-Block with optics integrated in the top, Ø: 250mm, H: 395mm, protection category IP65, protection class I with option class II, features 2-way catenary suspension with adjustable heights and optional loop in-and-out, standard colour: graphite-mica finish [4].

Aw: 0,086 m², weight: 10 kg
Catenary suspended fitting SX 282 ■ ■ - ■

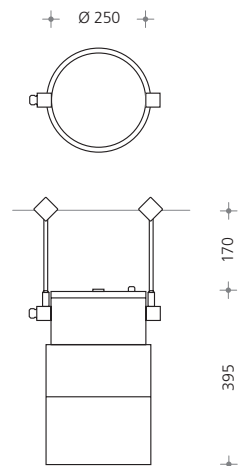


mini-road
symmetric

HIT-CE

20W** → 2 0		
LVK → 7626		
35W* → 2 1		
LVK → 7626		
70W* → 2 2		
LVK → 7626		

** 20W G8,5 base • * G12 base

Please complete reference no. with the relevant codes for optics, lamp and colour.

Specification example: LANOVA Post top Lightstack SX 280 ■ mini-road asym. 20W 3 0 ■ graphite mica finish - 4

Colour code: → ■ graphite-mica finish - 4 choice of colours - 9