→ STAIRWAYS AND PATHWAYS
→ ENTRANCE AREAS
→ PEDESTRIAN PRECINCTS

**MTR 200 Wall fitting** with bracket.

Housing made of die-cast aluminium, aluminium, stainless steel, PMMA, painted, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, MTR 200-refractor, Ø: 200mm, H: 460mm, protection category IP54, protection class I with option class II, including wall bracket of die-cast aluminium and terminal block with fuse, painted,
standard colour: black [-2].

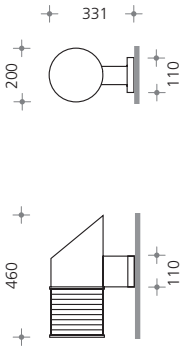


**Wall fitting** **SX 563** - 

| HSE | | HIE-CE |
|---|---|---|
| | | |
| 70W→ 1 1<br>LVK→7821 | | 70W→ 1 3<br>LVK→7821 |

MTR 200 refractor

**MTR 200 Bollard** for mounting on plinth or separate buried base.

Housing made of die-cast aluminium, aluminium, stainless steel, PMMA, painted, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, MTR 200-refractor, Ø: 200mm, H: 1350mm, protection category IP54, protection class I with option class II, column without door, painted, supplied with IP54 fuse box 2x5x10mm² for loop in-and-out,
standard colour: black [-2].

**Bollard** **SX 713** - 

| HSE | | HIE-CE |
|---|---|---|
| | | |
| 70W→ 3 1<br>LVK→8004 | | 70W→ 3 3<br>LVK→8004 |

MTR 200 refractor

Please complete reference no. with the relevant codes for optics, lamp and colour.

| **Specification example: SX 563 1 1 - 2** | **MTR 200 Wall fitting SX 563** | **HSE 70W MTR 200 1 1** | **black - 2** |
|---|---|---|---|

**Colour code:** → black - 2, choice of colours - 9

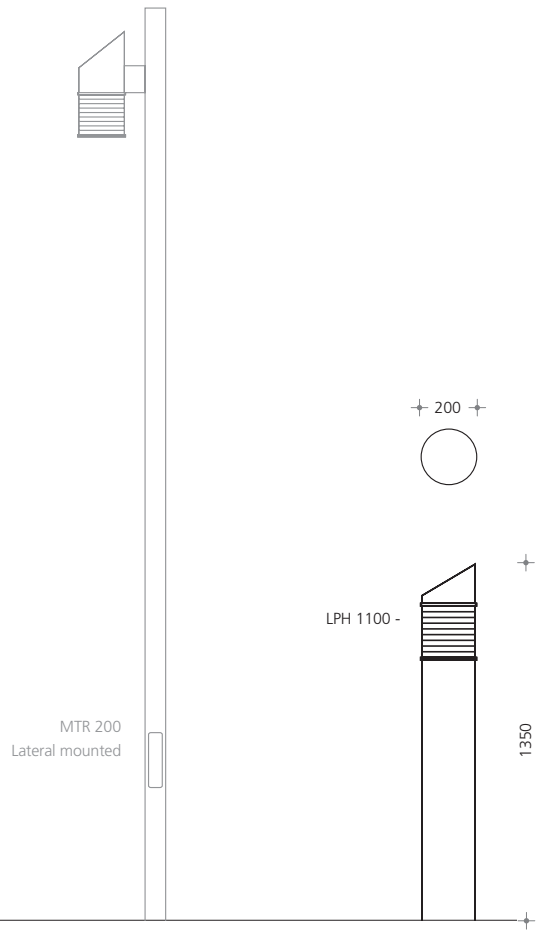


**Buried base** of galvanised steel with flange and anti-sink plate
H: 500mm, flange plate Ø: 200mm, anti-sink plate □ 200mm **SX 97-052-0**

IP54 LVK → selux.de/lvk

selux EXTERIOR I Semperlux AG I Lichttechnische Werke I Motzener Str. 34 I 12277 Berlin I Tel.: +49.30.720 01-0 I Fax: +49.30.720 01-100 I E-Mail: info@selux.de I Internet: www.selux.de