



- STAIRWAYS AND PATHWAYS
- ENTRANCE AREAS
- PEDESTRIAN PRECINCTS

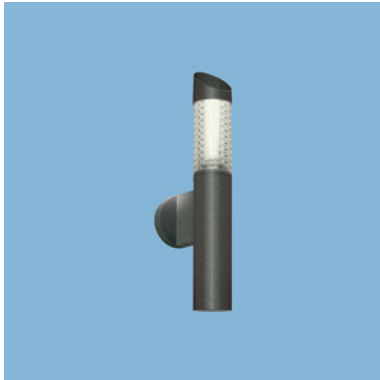

**MTR 90 Wall fitting** with bracket.

Housing made of die-cast aluminium, aluminium, stainless steel, PMMA, painted, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, MTR 90-refractor, Ø: 90mm, H: 570mm, protection category IP54, protection class I with option class II, including wall bracket of die-cast aluminium and terminal block with fuse, painted, standard colour: black [-2].



Wall luminaire **SX 711** ■ ■ - ■

**TC-D\***



MTR 90 refractor

	26W → <span style="color: #00AEEF;">1 0</span>	
	LVK → 8001	



**MTR 90 Bollard** with extended buried base.

Housing made of die-cast aluminium, aluminium, stainless steel, PMMA, painted, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, MTR 90-refractor, Ø: 90mm, H: 650/500mm or 1250/500mm, protection category IP54, protection class I with option class II, column without door with extended buried base and anti-sink plate □ 300mm, Terminal block with fuse, standard colour: black [-2]



Bollard **SX 710** ■ ■ - ■

**TC-D\***




MTR 90 refractor  
H: 650mm



MTR 90 refractor  
H: 1250mm

	26W → <span style="color: #00AEEF;">1 0</span>	
	LVK → 8001	
	26W → <span style="color: #00AEEF;">1 1</span>	
	LVK → 8001	

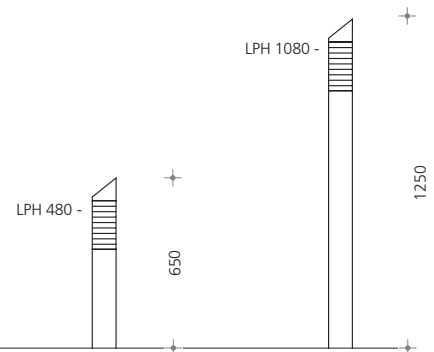

\*26W: G24d-3 base

Please complete reference no. with the relevant codes for optics, lamp and colour.

<b>Specification example:</b> SX 711 <span style="color: #00AEEF;">1 0</span> - <span style="color: #E91E63;">2</span>	<b>MTR 90 Wall fitting</b> SX 711	<b>TC-D 26W / Bollard</b> MTR 90 <span style="color: white;">1 0</span>	<b>black</b> <span style="color: white;">- 2</span>
---	--------------------------------------	---	--

Colour code: → ■ black - 2, choice of colours - 9