

se'lux®



LUCEA®

- > INDIVIDUAL OR SYSTEM FIXTURES
- > INDIRECT/DIRECT AND INDIRECT ILLUMINATION
- > LOW PROFILE EXTRUDED ALUMINIUM
- > LASER CUT END CAPS
- > SILVER FINISH
- > DIMMABLE OPTION
- > EMERGENCY OPTIONS ON REQUEST
- > SATIN PARABOLIC LOUVRE
- > SWITCHABLE SEPARATELY
- > GLARE FREE (L<1000CD/M2 FOR  $\gamma>65^\circ$ )



**LUCEA PENDANT - INDIRECT/DIRECT**

1 x 28W Direct + 2 x 54W Indirect

SILVER	STANDARD	DIMMABLE/DALI	L	P	S	W	DATA
Individual Fixture	<b>SX 796 013 128</b>	<b>SX 796 013 128/06</b>	1428	1200mm	1500mm	8.3kg	D 4830 / I 4831
Feed-in module*	<b>SX 796 043 128</b>	<b>SX 796 043 128/06</b>	1428	1200mm	1500mm	8.3kg	D 4830 / I 4831
Mid module*	<b>SX 796 053 128</b>	<b>SX 796 053 128/06</b>	1428	1200mm	1500mm	8.3kg	D 4830 / I 4831
End module*	<b>SX 796 063 128</b>	<b>SX 796 063 128/06</b>	1428	1200mm	1500mm	8.3kg	D 4830 / I 4831


\*modules require couplers - see page 6

**LUCEA PENDANT - INDIRECT ONLY**

2 x 54W Indirect

SILVER	STANDARD	DIMMABLE/DALI	L	P	S	W	DATA
Individual Fixture	<b>SX 797 013 254</b>	<b>SX 797 013 254/06</b>	1428	1200mm	1500mm	8.3kg	D 4831
Feed-in module	<b>SX 797 043 254</b>	<b>SX 797 043 254/06</b>	1428	1200mm	1500mm	8.3kg	D 4831
Mid module	<b>SX 797 053 254</b>	<b>SX 797 053 254/06</b>	1428	1200mm <td 1500mm	8.3kg	D 4831	
End module	<b>SX 797 063 254</b>	<b>SX 797 063 254/06</b>	1428	1200mm	1500mm	8.3kg	D 4831

\*modules require couplers - see page 6

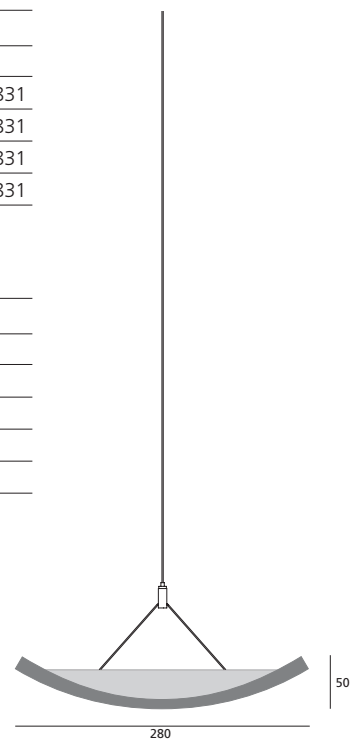

L - Length P - Fixing points S - Suspension W - Weight DATA - Photometrics on request



**LUCEA®** > PENDANT > AXIS PARALLEL OR MULTI-ORIENTATION FIXTURE


- > INDIRECT/DIRECT AXIS PARALLEL VERSION
- > SINGLE LUMINAIRE FOR TWO-PERSON OFFICE
- > SUITABLE FOR A WIDE RANGE OF OFFICE CONFIGURATIONS
- > IDEAL FOR OFFICES REQUIRING FLEXIBLE LAYOUTS
- > LOW PROFILE EXTRUDED ALUMINIUM
- > LASER CUT END CAPS
- > SILVER FINISH
- > DIMMABLE OPTION
- > EMERGENCY OPTIONS ON REQUEST
- > SATIN PARABOLIC LOUVRE
- > SWITCHABLE SEPARATELY
- > GLARE FREE ( $L < 1000 \text{CD/M}^2$  FOR  $\gamma > 65^\circ$ )





**LUCEA PENDANT - INDIRECT/DIRECT AXIS PARALLEL**

2 x 24W Direct + 2 x 80W Indirect

SILVER	STANDARD	DIMMABLE/DALI	L	P	S	W	DATA
Individual Fixture	<b>SX 799 013 224</b>	<b>SX 799 013 224/06</b>	2350	2120mm	1500mm	12.3kg	D 4830/ I 4831




Luminaires orientated to the building's axis.  
Aligning luminaires to the workplace and at right angles to the window is an especially economical way of realising architecturally sound lighting solutions. A two man office (approx. 20m<sup>2</sup>) can be adequately illuminated using just one luminaire

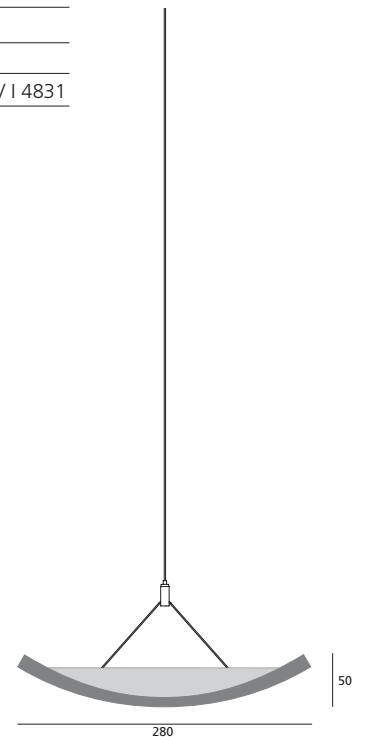

L - Length P - Fixing points S - Suspension W - Weight DATA - Photometrics on request

**LUCEA® > PENDANT > INDIRECT > 3 CIRCUIT TRACK > SPOTLIGHT**

- > INDIVIDUAL OR SYSTEM FIXTURES
- > INDIRECT WITH 3 CIRCUIT TRACK
- > LOW PROFILE EXTRUDED ALUMINIUM
- > LASER CUT END CAPS
- > SILVER FINISH
- > EMERGENCY OPTIONS ON REQUEST

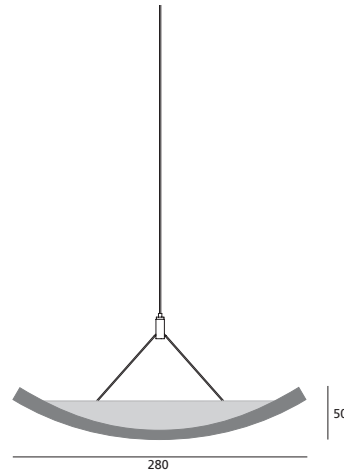



**LUCEA PENDANT - INDIRECT/TRACK**

2 x 54W Indirect

SILVER	STANDARD	DIMMABLE/DALI	L	P	S	W	DATA
Individual Fixture	<b>SX 798 013 254</b>	<b>SX 798 013 254/06</b>	1428	1200mm	1500mm	12.3kg	4831
Feed-in module*	<b>SX 798 043 254</b>	<b>SX 798 043 254/06</b>	1428	1200mm	1500mm	12.3kg	4831
Mid module*	<b>SX 798 053 254</b>	<b>SX 798 053 254/06</b>	1428	1200mm	1500mm	12.3kg	4831
End module*	<b>SX 798 063 254</b>	<b>SX 798 063 254/06</b>	1428	1200mm	1500mm	12.3kg	4831

\*module requires couplers - see page 6

**LUCEA® SPOTLIGHTS**

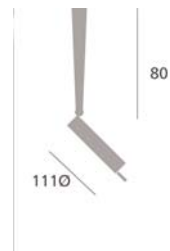

**LUCEA SPOTLIGHT\***

SILVER


QPAR 30 E27 max100W **SX 9-22131M**



**LUCEA SPOTLIGHT\***

SILVER


QPAR 38 GZ10 max100W **SX 20-2070008**



L - Length P - Fixing points S - Suspension W - Weight DATA - Photometrics on request  
\*System OLIGO

## LUCEA® > WALL MOUNTED


- > INDIRECT ASYMMETRIC
- > SILVER FINISH
- > LASER CUT END CAPS
- > DIECAST WALL BRACKETS

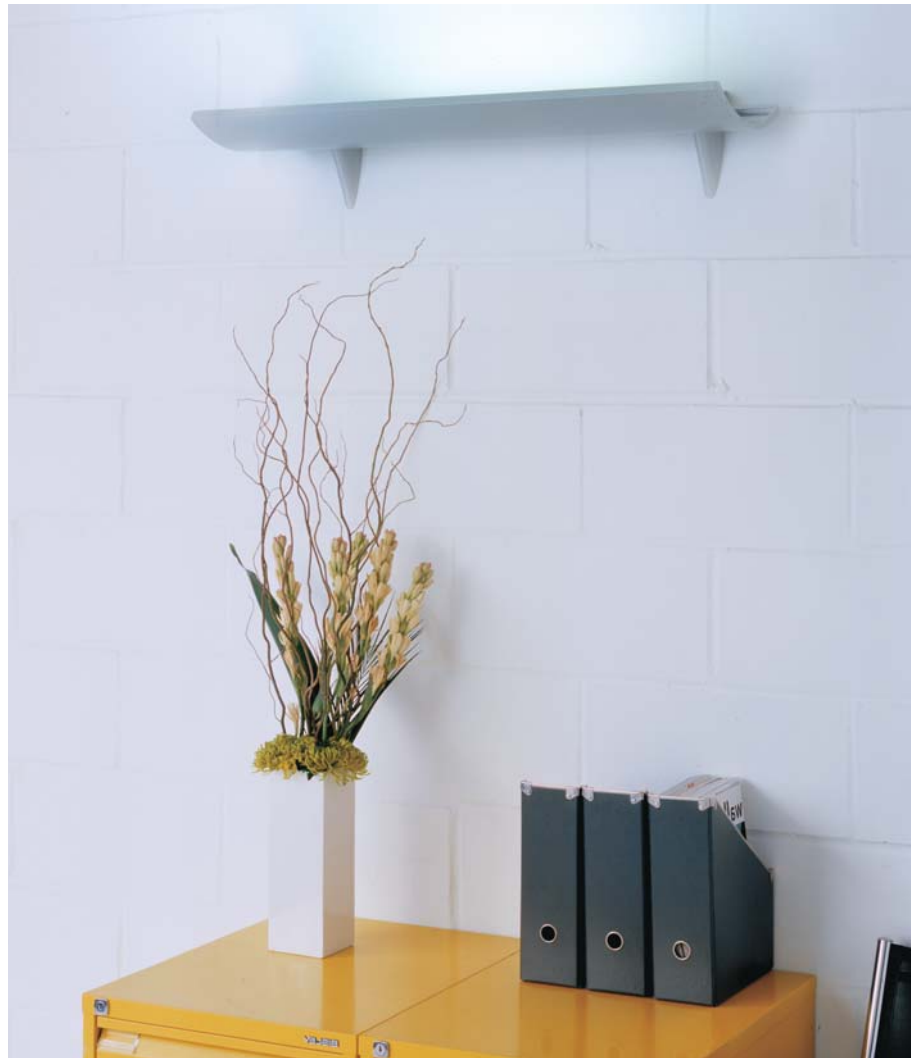

### LUCEA WALL MOUNTED

TC-L 1 x 55W Indirect

SILVER		L	P	W	DATA
Standard	<b>SX 800 013 155</b>	890	645	6,8kg	4832
Dimmable/DALI	<b>SX 800 013 155/06</b>	890	645	6,8kg	4832

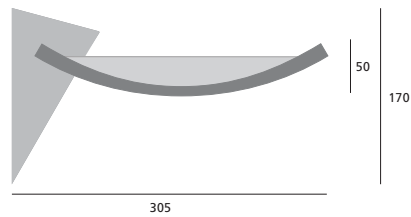

L - Length P - Fixing points W - Weight DATA - Photometrics on request





- > COUPLERS FOR SYSTEM FIXTURES
- > SILVER FINISH



**LUCEA 90° COUPLER**  
**SX 99-580-3**



**LUCEA VARIABLE COUPLER 90° - 270°**  
**SX 99-581-3**

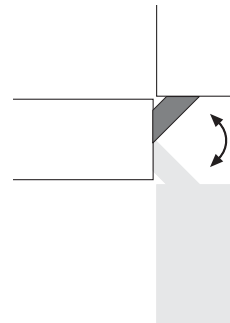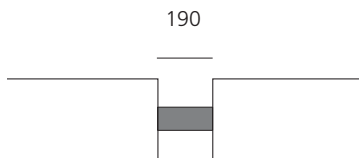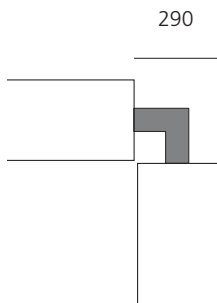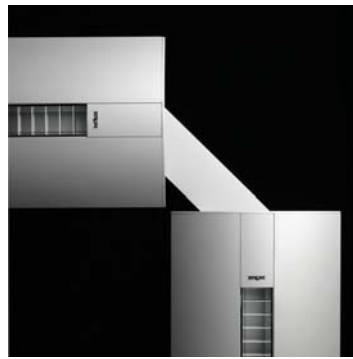

se'lux offer a comprehensive range of high quality luminaires. Innovative fixtures designed to help architects and designers create exceptional spaces to live and work. To find out more about the complete range of se'lux fixtures please contact us:



# www.selux.com

**Germany Headquarters**  
Semperlux Aktiengesellschaft  
Lichttechnische Werke  
Motzener Str. 34  
D-12277 Berlin  
Tel +49 (30) 720 01-0  
e-mail: info@selux.de

**Asia**  
Tel.: +65 6 270 97 73  
e-mail: selux.asia@pacific.net.sg

**Austria**  
Tel.: +43 (0)1 615 46 90  
e-mail: office@selux.at

**Australia/New Zealand**  
Tel.: +61 (2) 99 72 77 27  
e-mail: info@selux.com.au

**Belgium**  
Tel.: +32 (3) 448 30 37  
e-mail: info@selux.be

**Canada**  
Tel.: +1 (845) 691 77 23  
e-mail: seluxus@selux.com

**Czech Republic**  
Tel.: + 420-543215566  
email: info@profilux.cz

**Finland**  
Tel.: +358 (9) 819 01 00  
e-mail: info@pejan.fi

**France**  
Tel.: +33 (4) 78 34 10 14  
e-mail: p.dechaume@idelum.com

**Great Britain**  
Tel.: +44 (1926) 83 34 55  
e-mail: enquire@selux.co.uk

**Italy**  
Tel.: +39 (035) 68 38 00  
e-mail: selux.italia@tiscali.it

**Luxembourg**  
Tel.: +352 (26) 00271  
Internet: http://www.selux.com

**Netherlands**  
Tel.: +31 (165) 57 09 57  
e-mail: info@selux.nl

**Poland**  
Tel.: +48 (22) 736 73 15  
e-mail: light@euro-light.pl

**Portugal**  
Tel.: +351 (219) 748 346  
e-mail: lisboa@inovodecor.com

**Spain**  
Tel.: +34 (915) 982 660  
e-mail: madrid@inovodecor.net

**Sweden**  
Tel.: +46 (8) 54 47 09 40  
e-mail: info@selux.se

**Switzerland**  
Tel.: +41 (31) 992 98 30  
e-mail: info@selux.ch

**USA**  
Tel.: +1 (845) 691 77 23  
e-mail: seluxus@selux.com